



Quality and Reliability, Since 1932!


# MONITORING MANHOLES

## ROUND STEEL BOLTED MANHOLE

### Application -

Application where an 18" manhole is required for tank monitors and wells.

### Part Number - 98MW

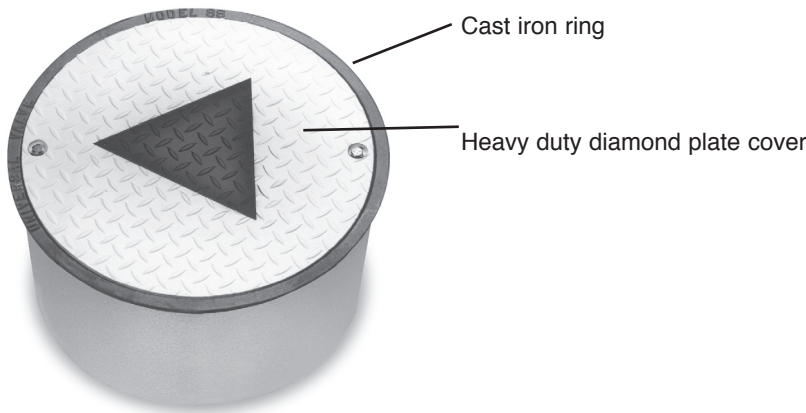


### Features -

- ✓ Cast iron ring for maximum strength
- ✓ Excellent security with flush mounted stainless steel bolts
- ✓ H-20 load rating

### Construction -

- 18 gauge galvanized steel skirt
- Stainless steel bolts
- 3/8" heavy duty diamond plate steel cover
- Polymeric coating

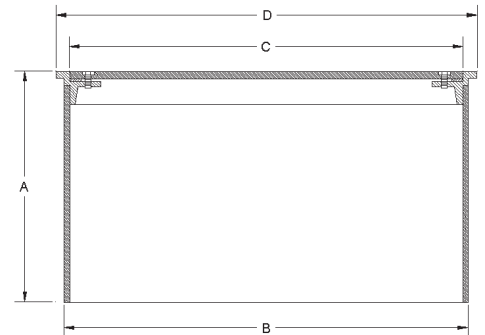

Model	Size	Weight (lbs.)	A	B	C	D	Cover Thickness
98MW-1810	18" x 10"	48	11-1/2"	17-1/2"	17-11/16"	19"	3/8"
98MW-1212	12" x 12"	26.5	13 3/8"	12 1/4"	12 3/4"	13 1/2"	3/8"

### Replacement Parts

Part Numbers	Description
1300-246	Pop Rivet
65-BT	Bolt 3/8 - 16 x 1" Stainless Steel
98-1810-WOC	18" Ring and Skirt Bolt Down
98MW-18-CO	18" MW Bolt Down Diamond Plate Cover
98MW-12-A2	12" MW Bolt Down Diamond Plate Cover
98-1212-WOC	12" Ring and Skirt Bolt Down

Notice: Universal Valve Co., products must be used in compliance with applicable federal, state, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and material to be handled. Universal Valve Co., makes no warranty of fitness for a particular use. All illustrations and specifications in this literature are based on the latest production information available at the time of publication. Prices, materials, and specification are subject to change at any time, and models may be discontinued at any time, in either case, without notice or obligation.

### UNIVERSAL VALVE COMPANY

478 Schiller Street, Elizabeth, NJ 07206 • (800) 223-0741 • (908) 351-0606 • Fax: (908) 351-0369 • universalvalve.com

© 2017 Universal Valve Company, Inc.