



Proven Performance Since 1932.

E85
85% Ethanol


AST EMERGENCY VENTS

BLOW OFF VENTS

Application -

For all AST storage applications. Allows venting to relieve the excessive internal pressure build-up. The emergency vents will open at approximately 1 PSI.

Part Number - 48

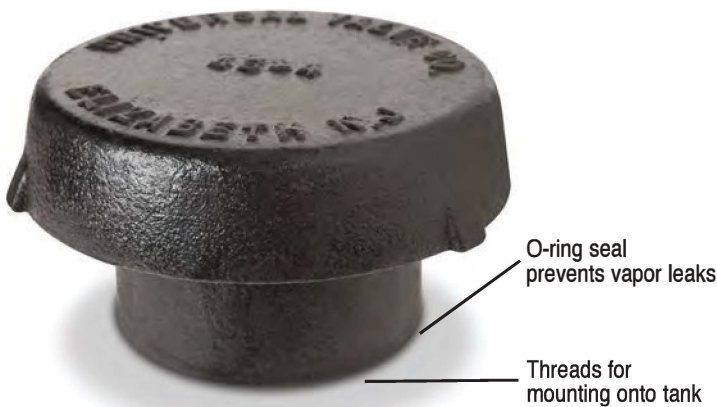

UNIVERSAL
Advantage

Only from Universal! –The unique mushroom design specifically prevents water and contaminants from entering the AST.


Features -

- ✓ O-ring seal prevents vapor leaks
- ✓ Mounts onto the tank
- ✓ Female threads
- ✓ Non-corrosive polymeric coating
- ✓ Meets state and federal regulations
- ✓ Compatible with E-85

Construction -

- Rugged epoxy coated cast iron body

Model	Thread Size	Weight (lbs.)	CFH Chart	A	B
48-40	4"	18.8	119,750	6"	7-1/2"
48-60	6"	30	246,130	6"	10"
48-80	8"	39	462,000	6"	12-1/2"
48M-40	4" Male	20.3	119,750	6-1/4"	7-1/2"
48M-60	6" Male	31.5	462,000	6-1/4"	10-1/4"

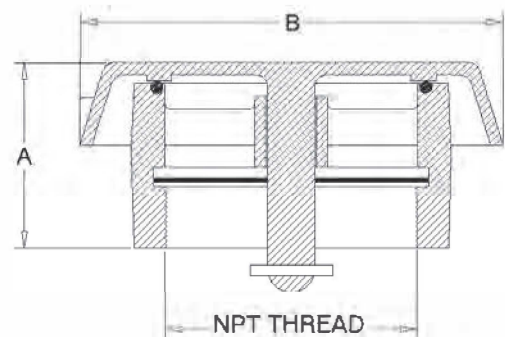

Notice: Universal Valve Co., products must be used in compliance with applicable federal, state, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and material to be handled. Universal Valve Co., makes no warranty of fitness for a particular use. All illustrations and specifications in this literature are based on the latest production information available at the time of publication. Prices, materials, and specification are subject to change at any time, and models may be discontinued at any time, in either case, without notice or obligation.

UNIVERSAL VALVE COMPANY

478 Schiller Street, Elizabeth, NJ 07206 • (800) 223-0741 • (908) 351-0606 • Fax: (908) 351-0369 • universalvalve.com

© 2020 Universal Valve Company, Inc.