
MONITORING MANHOLES

ROUND STEEL BOLTED MANHOLE

Application -

Application where an 18" manhole is required for tank monitors and wells.

Part Number - 98MW

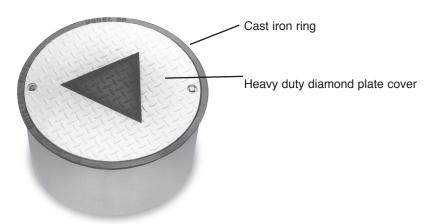


Features -

- Cast iron ring for maximum strength
- Excellent security with flush mounted stainless steel bolts
- ✓ H-20 load rating

Construction -

- · 18 gauge galvanized steel skirt
- · Stainless steel bolts
- · 3/8" heavy duty diamond plate steel cover
- · Polymeric coating



Model	Size	Weight (lbs.)) A	В	С	D	Thickness
98MW-1810	18" x 10"	48	11-1/2"	17-1/2"	17-11/16"	19"	3/8"
98MW-1212	12" x 12"	26.5	13 3/8"	12 1/4"	12 3/4"	13 1/2"	3/8"

Replacement Parts

Part Numbers	Description				
1300-246	Pop Rivet				
65-BT	Bolt 3/8 - 16 x 1" Stainless Steel				
98-1810-WOC	18" Ring and Skirt Bolt Down				
98MW-18-CO	18" MW Bolt Down Diamond Plate Cover				
98MW-12-A2	12" MW Bolt Down Diamond Plate Cover				
98-1212-WOC	12" Ring and Skirt Bolt Down				

Notice: Universal Valve Co., products must be used in compliance with applicable federal, state, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and material to be handled. Universal Valve Co., makes no warranty of fitness for a particular use. All illustrations and specifications in this literature are based on the latest production information available at the time of publication. Prices, materials, and specification are subject to change at any time, and models may be discontinued at any time, in either case, without notice or obligation.